



PCL2PDF User's Guide

Version 1.4.1

Overview

1

Installing a Permanent License

2

Using the PCL2PDF Transform

3

For information not in this
manual, refer to the Help
System in your product.

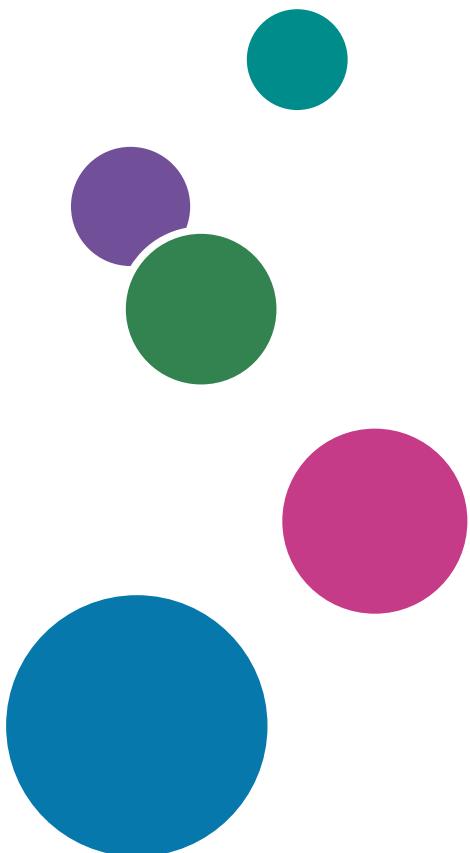


TABLE OF CONTENTS

Introduction

Important.....	2
Cautions regarding this guide.....	2
Symbols.....	2
Abbreviations	3
Trademarks.....	3

1 Overview

Benefits	5
Requirements	5
Limitations	5

2 Installing a Permanent License

3 Using the PCL2PDF Transform

Command syntax.....	11
Parameters.....	11

Introduction

Important

To the maximum extent permitted by applicable laws, in no event will the manufacturer be liable for any damages whatsoever arising out of failures of this product, losses of documents or data, or the use or non-use of this product and operation manuals provided with it.

Make sure that you always copy or have backups of important documents or data. Documents or data might be erased due to your operational errors or malfunctions of the software. Also, you are responsible for taking protective measures against computer viruses, worms, and other harmful software.

In no event will the manufacturer be responsible for any documents created by you using this product or any results from the data executed by you.

Cautions regarding this guide

- Some illustrations or explanations in this guide could differ from your product due to improvement or change in the product.
- The contents of this document are subject to change without notice.
- No part of this document may be duplicated, replicated, reproduced in any form, modified, or quoted without prior consent of the supplier.

Symbols

The following symbols are used in this manual to help you to identify content quickly.

Important

- This symbol indicates points to pay attention to when using the product. Be sure to read these explanations.

Note

- This symbol indicates helpful supplementary information that is not essential to completing a task.

Bold

Bold type indicates the names of commands and parameters.

Bold underline

Bold type indicates the default value.

Italic

Italic type indicates variables that you must replace with your own information.

Monospace

Monospace type indicates computer input and output and file names.

[]

Square brackets indicate that a value is optional.

|

A vertical bar indicates a choice between values.

...

An ellipsis indicates that a series can continue.

Abbreviations

PDF

Portable Document Format

PCL

Printer Command Language

Trademarks

These terms are trademarks or registered trademarks of International Business Machines Corporation in the United States, other countries, or both:

- AIX
- IBM

Adobe, the Adobe logo, PostScript, and the PostScript logo, PDF, and the PDF logo are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries.

Linux is a registered trademark of Linus Torvalds in the United States, other countries, or both.

Microsoft, Windows, and the Windows logo are trademarks of Microsoft Corporation in the United States, other countries, or both.

Oracle is a registered trademark of Oracle Corporation in the United States, other countries, or both.

PCL is a registered trademark of Hewlett-Packard Company.

Sentinel® is a registered trademark of Thales DIS CPL USA, Inc.

UNIX is a registered trademark of The Open Group in the United States and other countries.

The proper names of the Windows operating systems are as follows:

- Windows 10:
 - Microsoft Windows 10 Pro
 - Microsoft Windows 10 Enterprise
- Windows Server 2016:
 - Microsoft Windows Server 2016 Standard

1. Overview

- **Benefits**
- **Requirements**
- **Limitations**

The PCL2PDF transform converts Printer Command Language PCL5e, PCL5c and PCL XL data stream files into Adobe Acrobat Portable Document Format (PDF) files.

1

Benefits

The PCL2PDF transform gives you these benefits:

- The product is available on a wide selection of supported operating systems, like Windows, Linux and AIX.
- The client has the option to set encryption on resulted PDF that limits user's ability to print, modify or copy content using Adobe Acrobat or Adobe Reader.

Requirements

Transform client requirements:

- Microsoft Windows Server 2016 Standard or later
- Microsoft Windows 10 Pro, Enterprise or later
- IBM AIX 7.1 or later
- Linux kernel 2.6.32 or later (x86_64)

End-user client requirements:

- Adobe Acrobat
- Acrobat Reader

Limitations

The current limitations with the PCL2PDF transform include:

- Encryption method revision number is V2 from PDF reference documentation.
- Permissions apply correctly when both owner and user passwords are specified.
- Paper size is affected only when paper size value is not specified in the PCL input stream.

2. Installing a Permanent License


To use PCL2PDF Plus you need a licence. You must install a permanent licence on the computer where the product is installed.

To install a permanent license for PCL2PDF Plus:

1. Make sure that you have the e-mail containing the entitlement ID (EID) that you received from Ricoh.
2. If the computer where PCL2PDF Plus is installed does not have Internet access:
 1. Log into a computer that has Internet access.
 2. Use the Remote Desktop Connection to connect to the computer where PCL2PDF Plus is installed.
3. On the computer that has Internet access, go to this Web site: <https://dl.ricohsoftware.com>.

2

What action would you like to take?

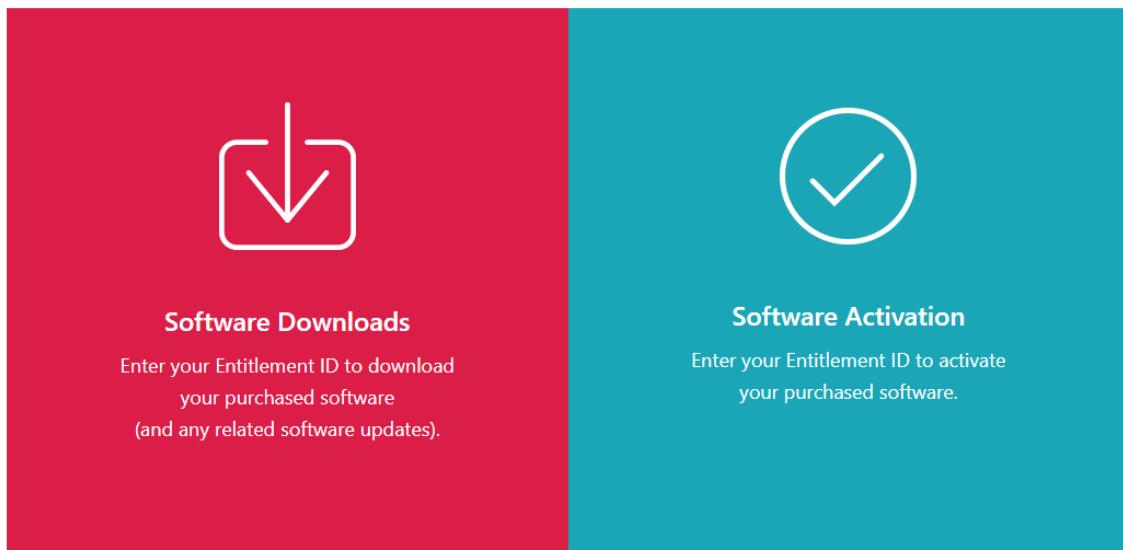

4. Click **Software Activation** on the right side of the screen.
5. In the **Software Activation** dialog, insert the EID and the system fingerprint.

Software Activation

Use the form below to activate your software. Enter your Entitlement ID and the System Fingerprint generated by the software.

2


Enter your EID: 

Enter your System Fingerprint: 

Confirm Content

1. Copy and paste the EID from the e-mail you received from Ricoh.
2. To obtain your machine fingerprint open a command prompt and run the command `pcl2pdf -f`. Copy your machine fingerprint. This action copies the 16-character system fingerprint that uniquely identifies the computer where PCL2PDF Plus is installed to the clipboard.
3. Return to the Software Activation webpage. Paste the system fingerprint in the **Enter your System Fingerprint** field.
4. Click **Confirm Content**.
6. In the **Activation Content Confirmation** dialog:
 1. Review the confirmation information.
 2. Click **Activate**.

You will receive a confirmation that your software has been activated. A license key is generated with an Activation ID for the client computer and is displayed on the screen.

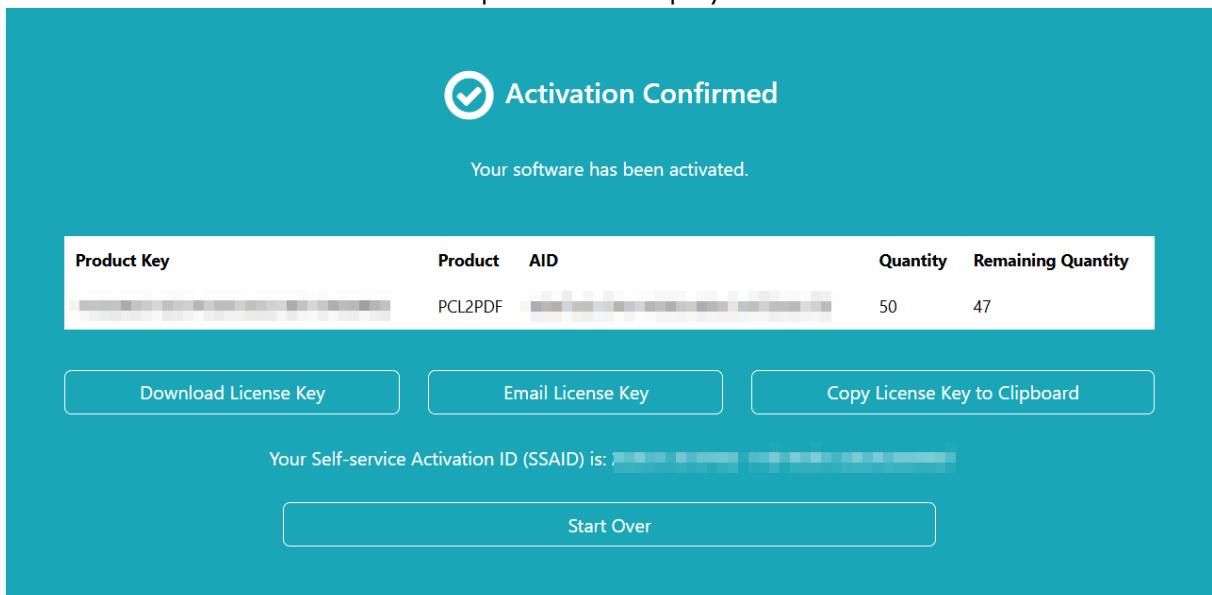

2

 **Note**

The number of activations of the license is displayed under **Quantity**. The remaining number of activations available for this license is displayed under **Remaining Quantity**.

7. To download the license key, click **Download License Key**. The saving procedure and file type are different for each browser. Record the folder where you saved the license key.
8. To e-mail the license key file to someone else, click **Email License Key**.

Enter Email Address



Please enter the email address you want the license key sent to.

Email

your_email@domain.com

Cancel

Send

1. Type the e-mail address.
2. Click **Send**.
9. If you are finished, close the browser tab. To restart the process, click **Start Over**.
10. Copy the license file in the same location where PCL2PDF Plus is installed.
11. You can start using the PCL2PDF transform.

2

3. Using the PCL2PDF Transform

- **Command syntax**
- **Parameters**

The PCL2PDF transform consists of a command-line interface and multiple configurable parameters.

Command syntax

The syntax for the pcl2pdf client command is::

```
pcl2pdf [-a perms] [-f] [-o password] [-u password] [-p size] input_fn [output_fn]
```

Parameters

The following parameters are required:

-a perms

Encryption permissions pcса (p: no printing, c: no changes, s: no selection, a: no adding notations).

- This parameter is used only with the **-o** parameter; otherwise, **-a** permissions are not applied.

-f

Get system fingerprint for license activation.

-o password

Encryption PDF Owner Password.

-p size

Paper size.

Note

- Paper size is affected by this parameter when the paper size value is not specified in the PCL input stream.

Paper type	Paper size
letter	8.5in x 11in (default)
ledger	17in x 11in
legal	8.5in x 14in
a4	8.27in x 11.69in
a3	11.69in x 16.53in
executive	7.25in x 10.5in
monarch	3.87in x 7.5in
com_10	4.12in x 9.5in
dl	4.33in x 8.66in
c5	6.38in x 9.01in
b5	6.93in x 9.84in

-u password

Encryption PDF User Password.

 **Note**

- -a permissions are not relevant, unless you specify -o.

